KOSO Feel The Speed

INSTRUCTION

Thank you for purchasing our product. Before installing/operating the product, read the instructions carefully and retain them for future reference.

⚠ Attention!

- For installation, follow the steps described. Any damage caused by wrong installation shall be imputed to the users.
- To avoid a short circuit from occuring do not pull or modify the wires during installation.
- Do not disassemble or change any parts. Opening and dissassembling this unit will void any warranty.
- Maintenance and repairs should be executed by our professionals only.

NOTE

⚠ Some procedures must be followed to avoid damages to the instrument.


⚠WARNING! Certain procedures must be followed to avoid damages to yourself, to the vehicle or to others.

1 ACCESSORIES

1 Thunderbolt LED Headlight X1



2 SPECIFICATIONS

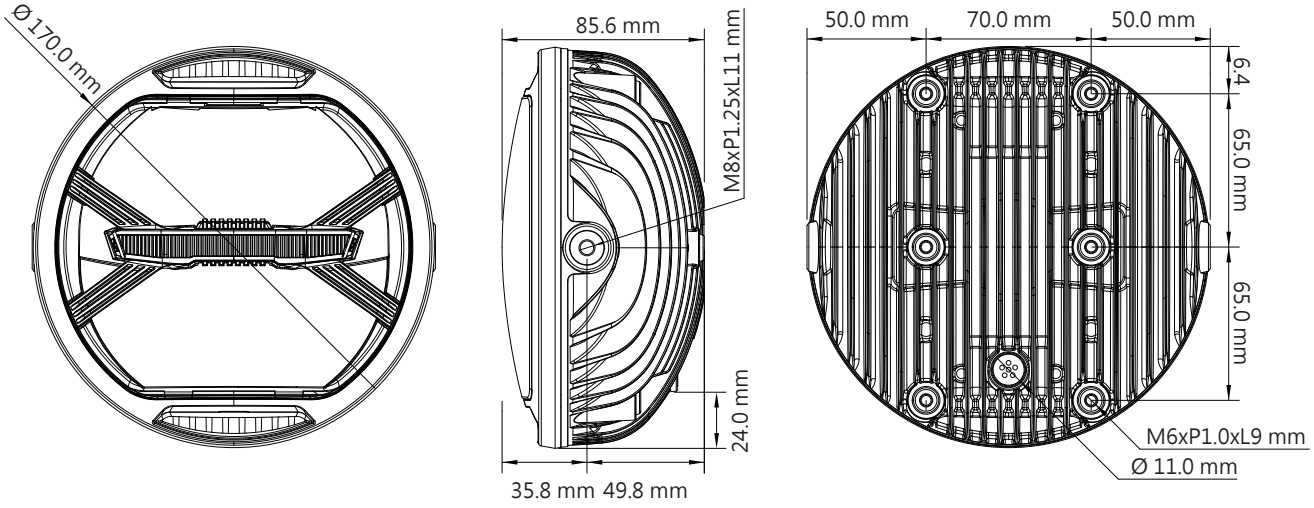


●Effective temperature range	-10 ~ 60 °C
●Effective voltage	DC 10 ~ 16 V
○Front position	DC 12 V / 5 W
○Low beam	DC 12 V / 15 W
○High beam	DC 12 V / 22 W

●Standard	JIS D 0203
●Homologation	E-Mark / DOT Approved / TW
●Size	Ø 170 X H 85.6 mm
●Weight	± 980 g

NOTE Design and specifications are subject to change without notice.

3 WIRING INSTALLATION INSTRUCTIONS

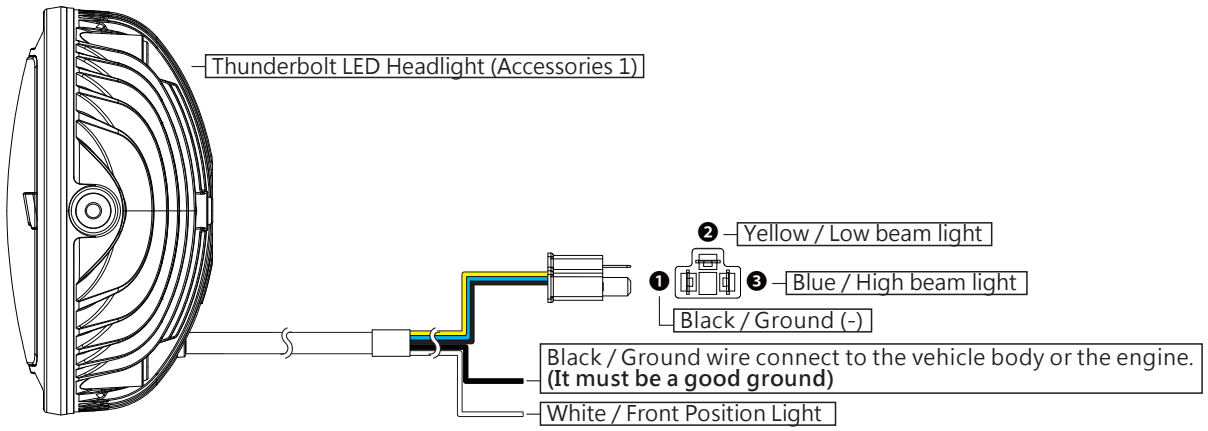

4 TROUBLE SHOOTING

The following situation do not indicate malfunction of the meter. Check the following before taking it in for repair.

Trouble	Check item
No LED indicator lighting up.	●Power supply cable may be disconnected. →Check if power supply cable is broken or disconnected. →Check if positive and negative poles are properly connected.

※ If the problems still cannot be solved, contact our technical department for assistance.